

P 088

Non-Flammable Wood Flooring Adhesive

SECTION I - PRODUCT IDENTIFICATION

Manufacturer's Name: Capitol USA, LLC
Address: 300 Cross Plains Blvd., Dalton, GA 30720
Emergency Phone: 800-535-5053 (InfoTrac)
Business Phone: 1-800-831-8381
Product Class: Non Flammable SBR Rubber Adhesive
Product Identity: P 088 Non-Flammable Wood Adhesive
DOT Hazard Classification: Adhesives, Class 6.1

SECTION II - HAZARDOUS COMPONENTS

% (By WT.)	PEL	TLV
Trichloroethane (1,1,1)	CAS #71-55-6	
5 - 7	350 ppm	350 ppm
Perchloroethylene	CAS #127-18-4	
15 - 25	25 ppm	50 ppm
Mineral Spirits	CAS #8052-41-3	
1 - 4	100 ppm	100 ppm
Aliphatic Petroleum Distillates	CAS #64742-89-8	
2 - 3	100 ppm	100 ppm

SECTION III - PHYSICAL DATA: Initial Boiling Point: 162°F; Vapor Pressure: 100.0 mm Hg @ 68° F; Vapor Density: 4.60; Specific Gravity: 1.4; Percent Volatiles: 33.5%; G/L VOC: Material: 76 g/l Coating: 104 g/l

SECTION IV - FIRE AND EXPLOSION DATA: Flash Point: NA; Explosive Limit: NA; Extinguishing Media: Water Fog; Hazardous Decomposition Products: May form toxic materials: carbon dioxide and carbon monoxide, hydrogen chloride, phosgene, various hydrocarbons of unknown structure. Unusual Fire and Explosion Hazards: Never use welding or cutting torch on or near cans (even empty) because resultant pressure could rupture. Empty cans should be incinerated. Special Fire Fighting Procedures: Water may be used to keep fire-exposed containers cool until fire is out. Wear self contained breathing apparatus with full face-piece operated in pressure-demand or other positive pressure mode when fighting fires.

SECTION V - HEALTH HAZARD DATA: Permissible Exposure Level: 350 ppm (tri)/25ppm (perc); Threshold Limit Value: 100 ppm (tri)/50ppm (perc); EFFECTS OF EXPOSURE: Eyes- Can cause irritation redness, tearing, blurred vision. Skin- Prolonged or repeated contact can cause moderate irritation, defatting, dermatitis. Breathing- Excessive inhalation of vapors can cause nasal and respiratory irritation, dizziness, weakness, fatigue, nausea, headache, and even asphyxiation. FIRST AID: Skin- Soap and water. Eyes- Flush with water, lifting upper and lower lids occasionally. Ingestion- Do not induce vomiting. Call physician or transport to an emergency facility. Inhalation- If affected, remove individual to fresh air. If breathing is difficult, administer oxygen. If breathing

has stopped, give artificial respiration. USE ONLY IN WELL VENTILATED AREAS.

SECTION VI - REACTIVITY DATA: Stability: Stable; Hazardous Polymerization: Cannot Occur

SECTION VII - SPILL OR LEAK PROCEDURES: STEPS TO BE TAKEN IN CASE MATERIAL IS RELEASED OR SPILLED: Absorb liquid on paper, vermiculite, floor absorbent, or other absorbent material and transfer to hood. Allow volatile portion to evaporate in hood. Allow sufficient time for vapors to completely clear hood duct work. Dispose of remaining material in accordance with applicable regulations.

SECTION VIII - PROTECTIVE EQUIPMENT:

VENTILATION: Adequate ventilation is essential to prevent vapor buildup. Open all available windows and entrances to insure good ventilation. Use fans to accelerate ventilation. RESPIRATOR PROTECTION: Adequate ventilation is normally sufficient. If eyes begin to water or dizziness or headaches are experienced, increase fresh air supply, wear an NIOSH approved respirator, or leave the area. PROTECTIVE GLOVES: Wear protective gloves to prevent skin contact. EYE PROTECTION: Wear glasses or protective goggles to avoid splashes. OTHER PROTECTIVE EQUIPMENT: None required. WASH HANDS THOROUGHLY WITH SOAP AND WATER.

SECTION IX - SPECIAL PRECAUTIONS: WARNING! Contains 1,1,1 Trichloroethane, a substance which harms public health and the environment by destroying the ozone layer in the upper atmosphere. Caution: Perchloroethylene is classified as a group 2B substance by the International Agency for Research on cancer (IARC) and is listed under California Proposition 65. According to the American Conference of Governmental Industrial Hygienists (ACGIH) the available animal and human evidence suggests that perchloroethylene "is not likely to cause cancer in humans except under uncommon or unlikely routes or levels of exposure." KEEP OUT OF REACH OF CHILDREN. Use only in applications as stated on the label. Do not take internally. Close container after each use. Avoid skin and eye contact.



Capitol USA, LLC
300 Cross Plains Blvd. • PO Box 2023
Dalton, GA 30722
800-831-8381 • Fax: 706-277-5753
Jim Walker ProScres TechLine 888-234-8400
Website: www.capitolusa.com



P 088

Non-Flammable Wood Flooring Adhesive



P 088 Non-Flammable Wood Flooring Adhesive has been the very foundation of our wood flooring program. P 088 is and has always been, the most trusted wood flooring adhesive around for the installation of parquet and laminated plank.

- Solvent/Rubber Based Performance
- High Solids
- Fast Early Grab
- Easy to Trowel

Description: Chlorinated Solvent Based Wood Flooring Adhesive

Flammability: Non-Flammable

Open Time: 30 - 45 minutes

Clean Up: Clean wet adhesive and tools with white cloth and mineral spirits.

Shelf Life: One year in closed container.

Limitations: Freeze Proof

Packaging: • 5 Gallon • 1 Gallon • 1 Quart


For The Installation Of:

- Parquet • Laminated Wood Plank

For Use Over:

- Concrete • Plywood • APA Grade Particle Board • OSB • Terrazzo • Hardwood Floors
- Latex-Portland Cement Underlayment • Gypsum Cement Underlayment • VCT • Felt Backed Vinyl Sheet Goods (prime with an acrylic sealer,

such as Capitol's LL400 Liquid Latex)
 • Do not use over existing cutback

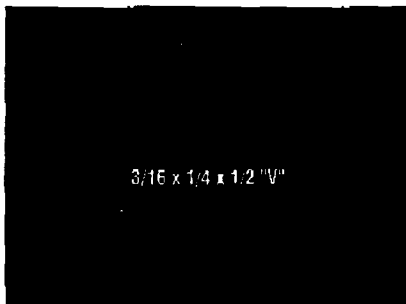


Instructions For Use:

1. Condition room and materials at 65°F for 48 hours prior to, during and after installation. Avoid hot and sunny conditions.
2. Sweep floor and remove any dirt or debris prior to installation.
3. Make sure floor is free from grease, oil, paint, or other contaminant that might interfere with the bond of the adhesive.
4. Do not install on floors with high moisture or alkali content.
5. Spread adhesive with the correct trowel making sure to maintain trowel notchings throughout the installation.
6. Allow the adhesive to flash for 45 minutes or until dry to touch prior to installing the flooring
7. Apply only as much adhesive that can be installed within 1 hour.
8. Press flooring firmly into adhesive.
9. Roll in both directions according to floor manufacturers recommendations.
10. Clean wet adhesive and tools with white cloth and mineral spirits.

Caution:

Avoid contact with skin and eyes. If splashed in eyes, flush with copious amounts of water for 15 minutes and call physician. Wash skin thoroughly with soap and water. Use with positive fresh air cross-ventilation. Do not take internally. If swallowed do not induce vomiting, call physician immediately. Keep container closed. **KEEP OUT OF REACH OF CHILDREN**



Capitol USA, LLC
 300 Cross Plains Blvd. • PO Box 2023
 Dalton, GA 30722
 800-831-8361 • Fax: 706-277-5753
 Jim Walker ProSeries TechLine 888-234-8400
 Website www.capitolusa.com